



DRIVEN BY POSSIBILITY™

# DATA MASTER™ DATA CENTER COOLING HOSE

## COOL DOWN, POWER UP, **BE RELIABLE**

Cooling data center systems is not just about thermal management. It's about guaranteeing performance, preventing slowdowns and crashes, safeguarding valuable infrastructure, and delivering energy efficient solutions.

Studies have shown that data center operations can save up to to 40% of their energy used to cool data centers by switching to liquid or hybrid cooling methods. And with over 18,000 data centers expected to be in operation in just a few years, the demand for quality, reliable data center cooling products is more prevalent than ever.

Gates products power the digital world, from financial transactions to social media interactions. Don't rely on chance; invest in proper cooling solutions to keep your data center operational.

## SPECIFICATIONS


- Zinc-free, peroxide-cured EPDM tube. Synthetic fiber braid reinforcement, and flame-resistant EPDM cover
- Wide temperature range: -40°F to +212°F (-40°C to +100°C)
- Compatible with:
  - Push-Lock or Lock-on style fittings
  - Crimped: GLX & SS
  - Clamped: Hose bead with clamp (less than hose rated working pressure, do not use clamps with Lock-On fittings)



**EXPLORE MORE  
DATA CENTER  
COOLING SYSTEMS**

HEAVY-DUTY SOLUTIONS FOR HIGH-DENSITY PERFORMANCE

Engineered to efficiently circulate coolant, the Gates Data Master Cooling Hose keeps your data center operational in the toughest conditions. Its zinc-free peroxide-cured EPDM tube offers the best compatibility with PG25 and other deionized water glycol coolant mixes to avoid fluid contamination and keep your servers running at maximum performance. Our hoses are specially designed to have a narrow profile (diameter) while using Gates special manufacturing techniques to make them flexible for easy connection.

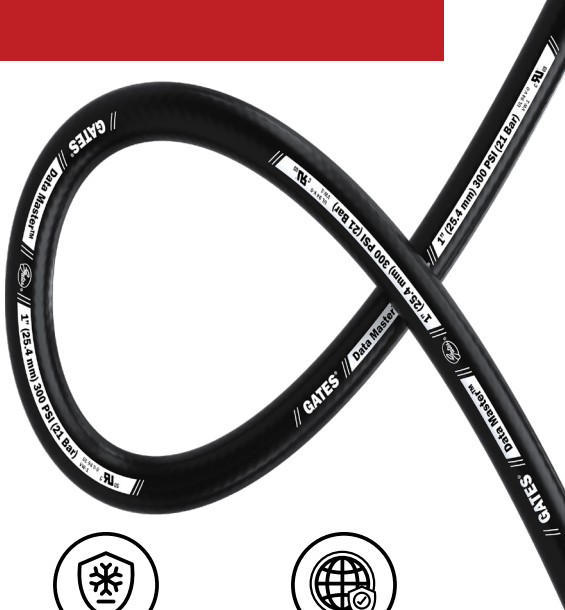

CLEANER SYSTEMS

Zinc-free Peroxide Cured EPDM tube to avoid fluid contamination over time



NARROW PROFILE

Smaller diameter for installation when space is constrained



FLAME-RESISTANT

Meets UL224 VW-1 and UL94V-0 standards



SUPERIOR FLEXIBILITY

For easier routing in complex configurations



COOLANT COMPATIBLE

Built for a wide range of coolant mixes, including PG25



OZONE-RESISTANT

Excellent ozone resistance to cover degradation from electronics

GATES DATA MASTER COOLING HOSE											
HOSE I.D.		HOSE O.D.		MAX. WORK PRESSURE		MINIMUM BURST		MINIMUM BEND RADIUS (ISO 10619, METHOD B)		WEIGHT REFERENCE	
in	mm	in	mm	psi	MPa	psi	MPa	in	mm	kg/m	lbs/ft
7/32	5.6	0.40	10.4	500	3.4	2,000	13.8	0.59	15.0	0.08	0.05
1/4	6.4	0.49	12.4	300	2.1	1,200	8.3	0.63	15.9	0.10	0.06
3/8	9.5	0.61	15.6	300	2.1	1,200	8.3	1.25	31.6	0.14	0.09
1/2	12.7	0.74	18.7	300	2.1	1,200	8.3	1.98	50.2	0.20	0.13
3/4	19.1	1.03	26.1	300	2.1	1,200	8.3	2.90	73.8	0.35	0.23
1	25.4	1.34	33.9	300	2.1	1,200	8.3	3.50	89.0	0.57	0.38

WHICH TUBE MATERIAL DO YOU WANT TO USE FOR YOUR CRITICAL EQUIPMENT?



PG25 COOLANT AFTER EXTRACTABLES TESTING WITH VARIOUS DATA CENTER HOSES AT 80°C FOR 600 HOURS


OUR DATA CENTER SOLUTIONS CAN PUT YOUR CRITICAL COOLING SYSTEMS RUNNING AT TOP CAPACITY IN NUMEROUS APPLICATIONS



CHILLED WATER SYSTEMS



CRAC OR CRAH UNITS



DIRECT TO CHIP LIQUID COOLING



LIQUID IMMERSION COOLING SYSTEMS



IN-ROW AND IN-RACK COOLING SYSTEMS

GATES IS A MEMBER OF THE OPEN COMPUTE PROJECT

As a member of the Open Compute Project, we are ready to work together with this forward-thinking community to create top-notch data center solutions for our customers. We truly believe that together, we can pave the way for a more innovative, sustainable, and efficient future.



OPEN COMMUNITY®