



DRIVEN BY POSSIBILITY™

POWERATED™

GREEN TEXTILE WRAPPED V-BELT WITH ARAMID CORD

Designed as an alternative to conventional light-duty belts, with high-performance construction to deliver more horsepower, less stretch, and provide longer service life.



CONSTRUCTION + SPECIFICATIONS

- Bareback construction for smooth clutching on shock loaded, backside-idler driven equipment
- Aramid tensile cords combine limited stretch with extraordinary strength and durability

FEATURES + BENEFITS

- Suitable for outdoor power equipment, appliances, and industrial applications where Fractional Horsepower (FHP) belts are typically used
- Low cord positioning in thin profile gives extreme flexibility
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards
- REACH and RoHS 2 compliant
- Operating temperature range: -30°C/-22°F to +60°C/140°F

BELT IDENTIFICATION

Singles: **6726 / 3L260K**

67 / 3L - Cross Section

26 / 260 - Outside Circumference (in) / Outside Circumference (in), plus added zero to designate part number

K - Aramid Designation


Available Stock Sizes

67/3L 16-74 (in)

68/4L 17-117 (in)

69/5L 23-100 (in)

BELT IDENTIFICATION CHART

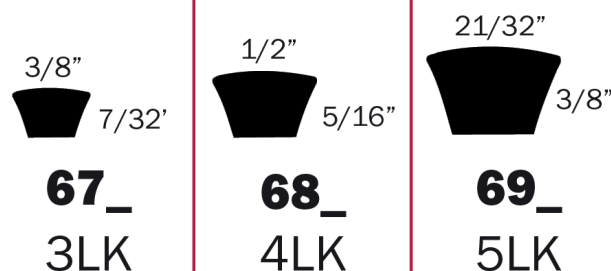

GATES AUSTRALIA PTY LTD

200 National Drive, Dandenong South VIC 3175
PH: +61 3 9797 9666 FAX: +61 3 9797 9600

WWW.GATES.COM/AU/EN.HTML
FOLLOW: GATES AUSTRALIA



SEPT 2021